

A Brighter Solution

AMP DISPLAY INC.

SPECIFICATIONS

LCD MODULE

CUSTOMER:	
CUSTOMER PART NO.	
AMP DISPLAY PART NO.	AF - 128128KFIQY-01H(R)
APPROVED BY:	
DATE:	

☐

APPROVED FOR SPECIFICATIONS

☐

APPROVED FOR SPECIFICATION AND PROTOTYPES

AMP DISPLAY INC

9856 SIXTH STREET RANCHO CUCAMONGA CA 91730
TEL: 909-980-13410 FAX: 909-980-1419
WWW.AMPDISPLAY.COM

RECORD OF REVISION

Revision Date	Contents	Editor
2006/11/16	New Release	Lorry

1 FEATURES

- (1) Display format : 128×128 dots, 1/128 duty.
- (2) Construction : LCD panel, Edge LED Yellow-Green Back-Light and COF technology.
- (3) Display type : FSTN , Transflective, Positive , 6 o' clock view
- (4) Controller : HD66750S.
- (5) +2.8V single power input.
- (6) Extended temperature type.
- (7) ROHS compliant.

2 MECHANICAL DATA

Parameter	Stand Value	Unit
Dot size	0.34(W) × 0.34(H)	mm
Dot pitch	0.35(W) × 0.35(H)	mm
Viewing area	54.0(W) × 50.0 (H)	mm
Module size	72.4(W) × 112.7(H) × 6.5 max.(T)	mm


3 ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Min	Max	Unit
Logic Circuit Supply Voltage		VDD-VSS	-0.3	+4.6	V
LCD Driving Voltage		VLCD-VSS	0	20.0	V
Input Voltage		VI	-0.3	VDD+0.3	V
Extended temp. type	Operating Temp.	TOP	-20	70	°C
	Storage Temp.	TSTG	-30	80	°C

4 ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
----- Electronic Characteristics -----							
Logic Circuit Supply Voltage	VDD-VSS	--	2.4	2.8	3.6	V	
LCD Driving Voltage (FSTN)		-20 °C	13.5	14.2	14.9	V	1/12 bias
		25 °C	12.8	13.5	14.2		
		70 °C	12.0	12.7	13.4		
Input Voltage	VIH	--	0.7VDD	--	VDD	V	
	VIL	--	-0.3	--	0.15 VDD	V	
Logic Supply Current	IDD	VDD 3.3V	--	0.8	1.2	mA	
----- Optical Characteristics (FSTN) -----							
Contrast	CR	25°C	--	13.8	--		Note 1
Rise Time	tr	25°C	--	168	--	ms	Note 2
Fall Time	tf	25°C	--	198	--	ms	
Viewing Angle Range	θ f	25°C & CR≥2	--	35	--	Deg.	Note 3
	θ b		--	33	--		
	θ l		--	36	--		
	θ r		--	36	--		
Frame Frequency	fF	25°C	--	64	--	Hz	
----- LED Back-light Characteristics -----							
Forward Voltage	VF	IF=30mA	--	4.2	--	V	Supply Voltage between A&K
Forward Current	IF	--	--	30	--	mA	
LCM Luminous intensity		IF=30mA	--	2.8	--	cd/m ²	


* LED Dice number = 6




(NOTE 1) Contrast ratio :

CR = (Brightness in OFF state) / (Brightness in ON state)


(NOTE 2) Response time :

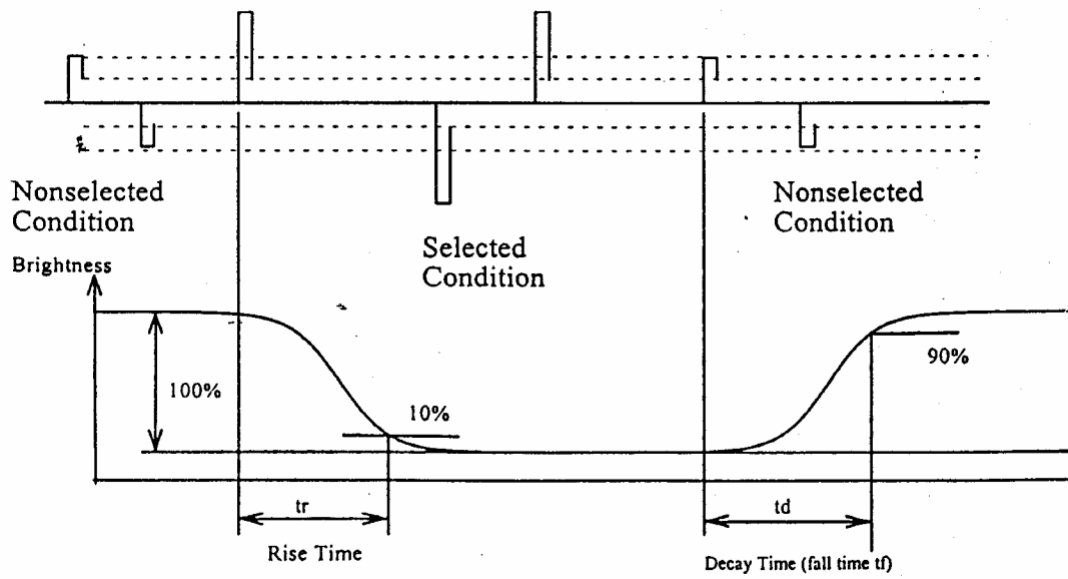

(NOTE 3) Viewing angle

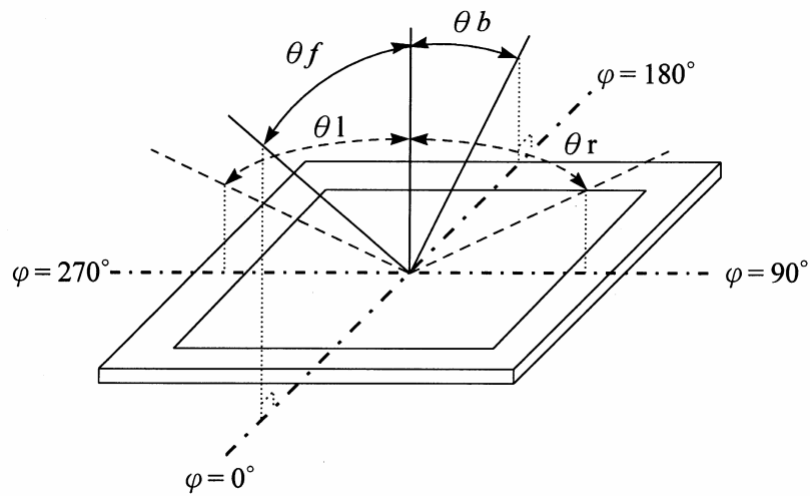


5 BLOCK DIAGRAM & INTERFACE

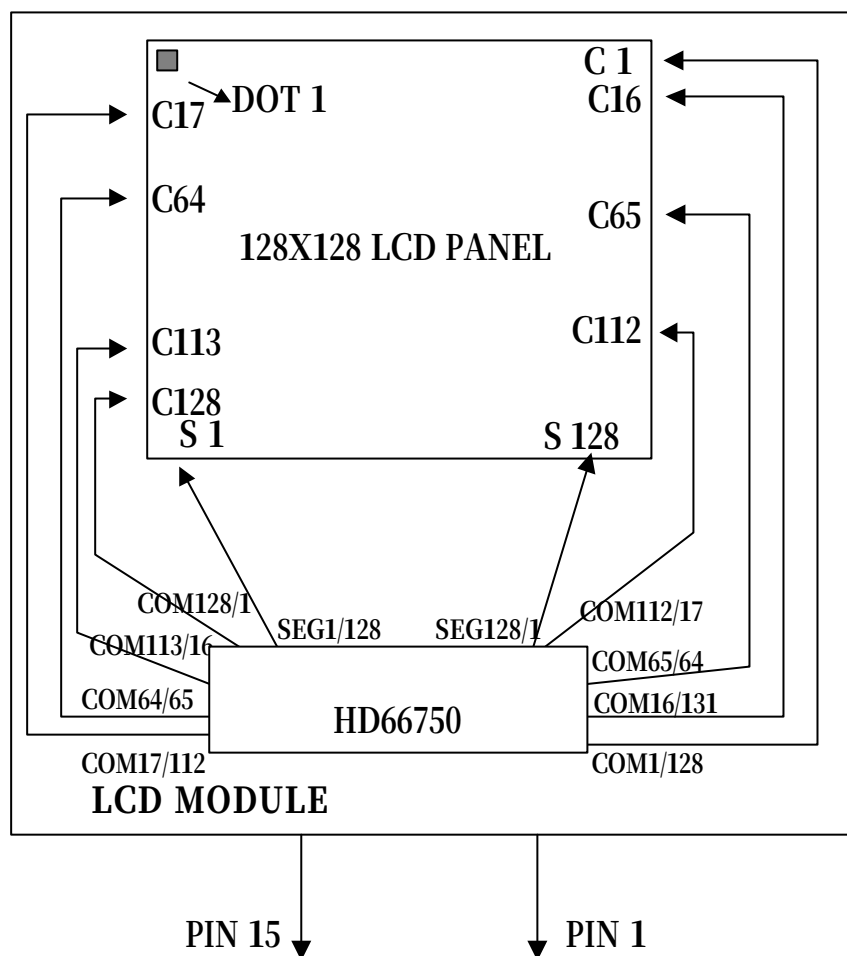

No.	Symbol	Function
1	VDD	Power supply for logic circuit
2~9	D7~D0	Data bus
10	/RES	Reset pin .Initializes the LSI when low
11	/CS	Chip select at low
12	A0	Select register Lo:Index/status Hi:Control
13	/WR	Data Write
14	/RD	Data Read
15	VSS	Ground (0V)

6 TIMING CHARACTERISTICS

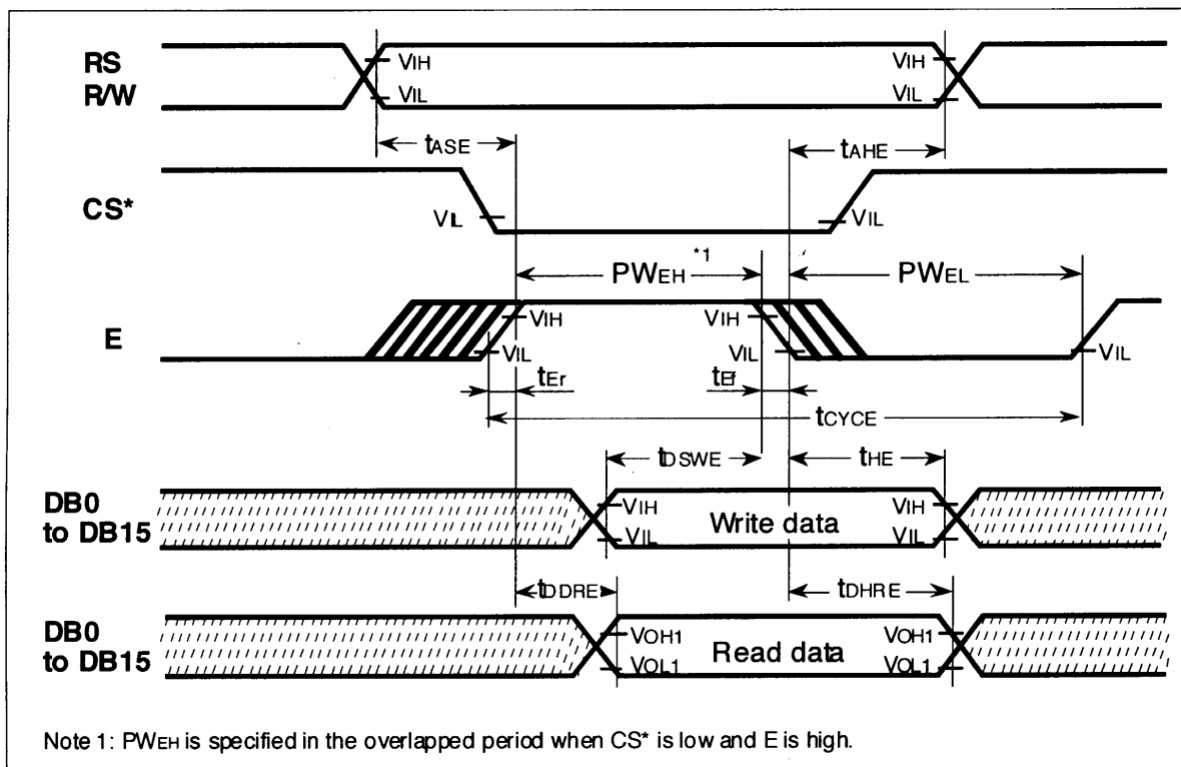

80-SYSTEM

Item	Symbol	VDD=1.8to2.4V		VDD=2.4to3.6V		Unit
		Min	Max	Min	Max	ns
Bus cycle time	tcycW	Write 600	--	380	--	
	tcycR	Read 800		500		
Lo level plusw width	PWLW	Write 120	--	70	--	
	PWLR	Read 350		250		
Hi-level pulse width	PWHW	Write 300	--	150	--	
	PWHRL	Read 300		150		
Enable rise/fall time	tWRr,WRf	--	25	--	25	
Address set-up time (RS, R/W to E)	tAS	50	--	50	--	
Address hold time	tAH	20	--	20	--	
Write Data set-up time	tDSW	60	--	60	--	
Write Data hold time	tH	20	--	20	--	
Read Data delay time	tDDR	--	300	--	200	
Read Data hold time	tDHR	5	--	5	--	


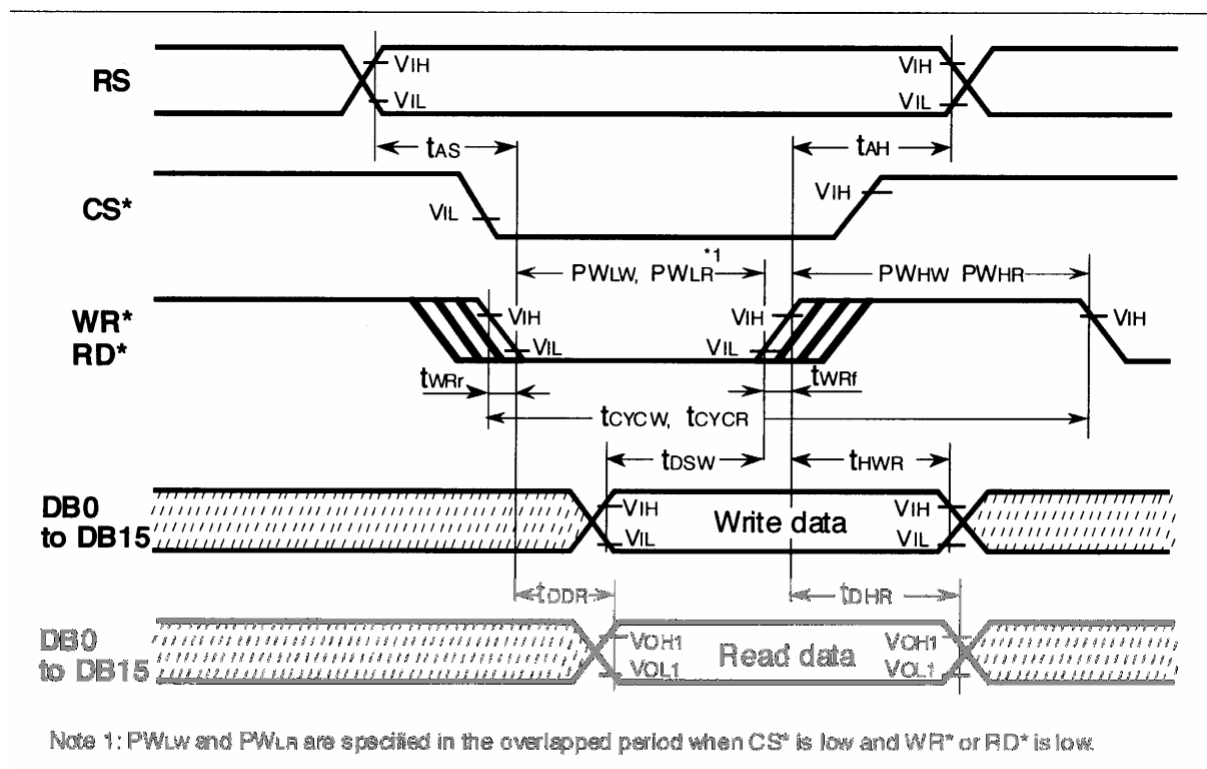


Figure 63 80-system Bus Timing

Reset Operation

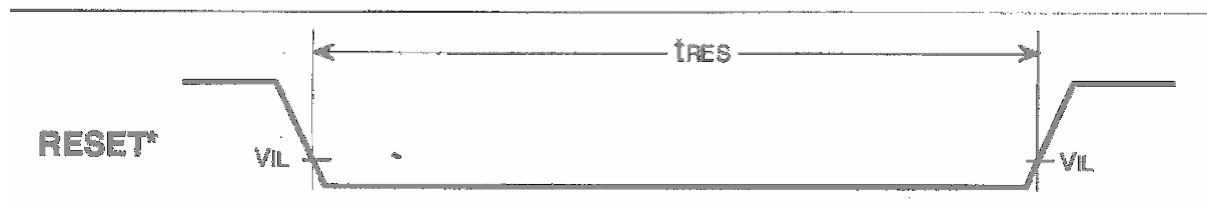

7 QUALITY AND RELIABILITY

7.1 TEST CONDITIONS

Tests should be conducted under the following conditions :

Ambient temperature : $25 \pm 5^{\circ}\text{C}$

Humidity : $60 \pm 25\% \text{ RH}$.

7.2 SAMPLING PLAN

Sampling method shall be in accordance with MIL-STD-105E , level II, normal single sampling plan .

7.3 ACCEPTABLE QUALITY LEVEL


A major defect is defined as one that could cause failure to or materially reduce the usability of the unit for its intended purpose. A minor defect is one that does not materially reduce the usability of the unit for its intended purpose or is an infringement from established standards and has no significant bearing on its effective use or operation.

7.4 APPEARANCE

An appearance test should be conducted by human sight at approximately 30 cm distance from the LCD module under fluorescent light. The inspection area of LCD panel shall be within the range of following limits.

7.5 INSPECTION QUALITY CRITERIA

Item	Description of defects			Class of Defects	Acceptable level (%)	
Function	Short circuit or Pattern cut			Major	0.65	
Dimension	Deviation from drawings			Major	1.5	
Black spots	Ave . dia . D	area A	area B	Minor	2.5	
	D≤0.2	Disregard				
	0.2<D≤0.3	3	4			
	0.3<D≤0.4	2	3			
	0.4<D	0	1			
Black lines	Width W, Length L		A	B	Minor	2.5
	W≤0.03		disregard			
	0.03<W≤0.05		3	4		
	0.05<W≤0.07 , L≤3.0		1	1		
	See line criteria					
Bubbles in polarizer	Average diameter D 0.2 < D < 0.5 mm for N = 4 , D > 0.5 for N = 1			Minor	2.5	
Color uniformity	Rainbow color or newton ring.			Minor	2.5	
Glass Scratches	Obvious visible damage.			Minor	2.5	
Contrast ratio	See note 1			Minor	2.5	
Response time	See note 2			Minor	2.5	
Viewing angle	See note 3			Minor	2.5	

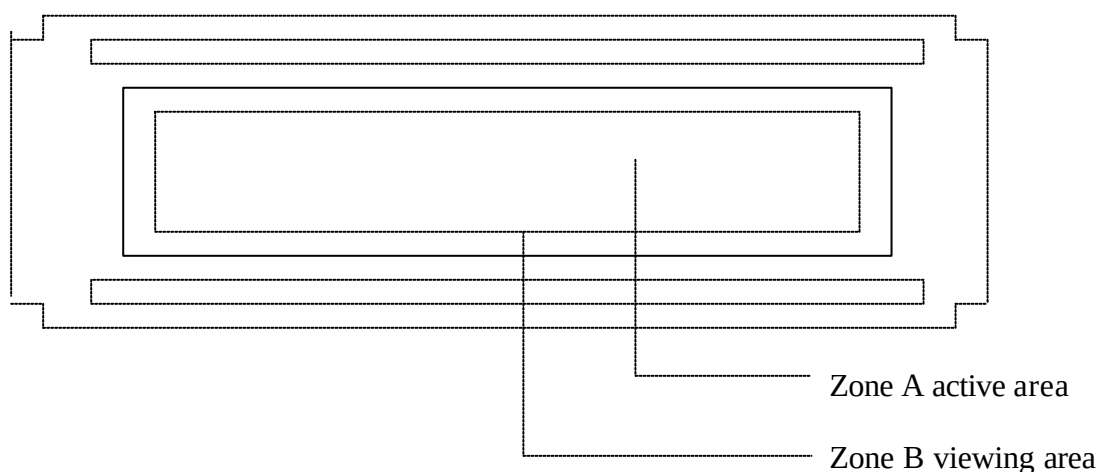

7.6 RELIABILITY

Test Item	Test Conditions	Note
	Extended Temp. type	
High Temperature Operation	70±3°C , t=96 hrs	
Low Temperature Operation	-20±3°C , t=96 hrs	
High Temperature Storage	80±3°C , t=96 hrs	1,2
Low Temperature Storage	-30±3°C , t=96 hrs	1,2
Thermal Shock Test	-30°C ~ 25°C ~ 80°C 30 min. 5 min. 30 min. (1 cycle) Total 5 cycle	1,2
Humidity Test	40 °C, Humidity 90%, 96 hrs	1,2
Vibration Test (Packing)	Sweep frequency : 10 ~ 55 ~ 10 Hz/1min Amplitude : 0.75mm Test direction : X.Y.Z/3 axis Duration : 30min/each axis	2

Note 1 : Condensation of water is not permitted on the module.

Note 2 : The module should be inspected after 1 hour storage in normal conditions
(15-35°C , 45-65%RH).

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

8 HANDLING PRECAUTIONS

- (1) A LCD module is a fragile item and should not be subjected to strong mechanical shocks.
- (2) Avoid applying pressure to the module surface. This will distort the glass and cause a change in color.
- (3) Under no circumstances should the position of the bezel tabs or their shape be modified.
- (4) Do not modify the display PCB in either shape or positioning of components.
- (5) Do not modify or move location of the zebra or heat seal connectors.
- (6) The device should only be soldered to during interfacing. Modification to other areas of the board should not be carried out.
- (7) In the event of LCD breakage and resultant leakage of fluid do not inhale, ingest or make contact with the skin. If contact is made rinse immediately.
- (8) When cleaning the module use a soft damp cloth with a mild solvent, such as Isopropyl or Ethyl alcohol. The use of water, ketone or aromatic is not permitted.
- (9) Prior to initial power up input signals should not be applied.
- (10) Protect the module against static electricity and observe appropriate anti-static precautions.

9 OUTLINE DIMENSION

